

IR DWDR Bullet Network Camera Full HD

G363-4302

Main Features


- Image sensor 1/2.8" Progressive Scan CMOS
- High Resolution up to 1920 x 1080 pixels Full HD / 25 fps
- Video compression H264/MPEG4/MJPEG
- Triple streams
- Day/Night with ICR filter
- DWDR, 3D DNR
- Built-in micro SD/SDHC/SDXC card slot, up to 64GB
- Smart Codec
- BLC, HLC, Defog, EIS, ROI up to 4 configurable areas
- Minimum illumination: 0.02Lux @F1.2, AGC on
0.027Lux @F1.4 AGC on, 0 lux with IR
- Shutter 1s - 1/100000 s
- Slow shutter
- Motorized Lens: 2.8 – 12mm@F1.4 angle of view: 113° - 33.8°
- Lens mount: Diameter 14
- Auto iris: DC Drive
- ONVIF, PSIA, CGI
- Working temperature / humidity: -30°C to +60°C, < 95%
- Power supply: 12VAC included



GUNNEBO®
For a safer world

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	0.01 Lux @ (F1.2, AGC ON), 0.014 Lux @ (F1.4, AGC ON), 0 Lux with IR
Shutter Speed	1/3s ~ 1/100,000s
Slow Shutter	Support
Lens	2.8-12mm @ F1.4, 113°~33.8°
Lens Mount	AF automatic focusing and motorized zoom lens
Auto-iris	DC drive
Day & Night	IR cut filter with auto switch
WDR	DWDR
Compression Standard	
Video Compression	H.264/MJPEG
H.264 Type	Baseline Profile / Main Profile
Video Bit Rate	32 Kbps – 8 Mbps
Audio Compression	G.711/G.722.1/G.726/MP2L2
Audio Bit Rate	64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)
Image	
Max. Resolution	1920 × 1080
Frame Rate	50Hz: 25fps (1920 × 1080) / (1280 × 960) / (1280 × 720) 60Hz: 30fps (1920 × 1080) / (1280 × 960) / (1280 × 720)
Third Stream	Independent with Main Stream and Sub Stream, up to 50Hz: 1fps (1920 × 1080) 60Hz: 1fps (1920 × 1080)
Image Enhancement	BLC/3D DNR/ROI/Defog
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
Day/Night Switch	Auto/Schedule/Triggered by Alarm In
Picture Overlay	LOGO picture can be overlaid on video with 128x128 24bit bmp format
Network	
Network Storage	NAS (Support NFS,SMB/CIFS), ANR
Alarm Trigger	Line crossing detection, Intrusion detection, scene change detection, audio exception detection, Motion detection, Dynamic analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Security	One-key recovery, flash-prevention, three streams, heartbeat, mirror, password protection, video mask, Watermark, IP address filtering, Anonymous access
Standard	ONVIF(PROFILE S,PROFILE G),PSIA,CGI,ISAPI
Interface	
Audio (-S)	1-ch 3.5 mm audio in(Mic in/Line in)/out interface
Communication Interface	1 RJ45 10M/100M Ethernet port, 1 RS-485 interface
Alarm (-S)	1 input, 1 output (up to DC24V 1A or AC110V 500mA)
Video Output (-S)	1Vp-p composite output (75 Ω/BNC)
On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
Reset Button	Yes
Smart Feature-set	
Behavior Analysis	Line crossing detection, Intrusion detection
Line Crossing Detection	Cross a pre-defined virtual line
Intrusion Detection	Enter and loiter in a pre-defined virtual region
Exception Detections	Scene change detection, Sudden audio increase/decrease detection, Audio loss detection, Defocus detection
General	
Protection Level	IP67
Operating Conditions	-30 °C – 60 °C (-22 °F – 140 °F), Humidity 95% or less (non-condensing)
Power Supply	12 V DC ± 10%, PoE (802.3af)
IR Distance	30m
Power Consumption	12W MAX
Dimensions	100×103.9×311.8mm (3.94" × 4.09" × 12.28")
Weight	2000g (4.41 lbs)

Dimensions

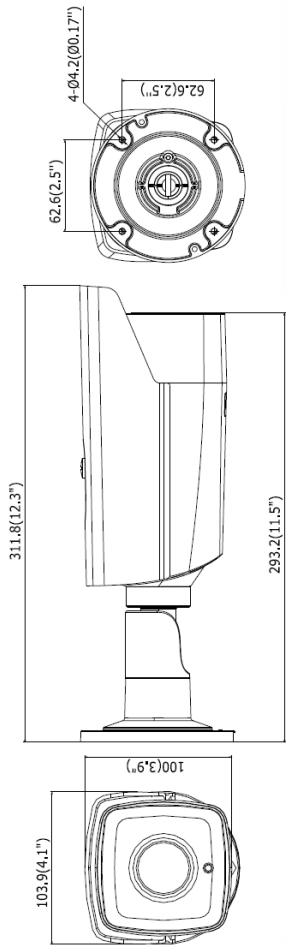

Les informations fournies par le présent document demeurent susceptibles de modifications sans préavis. Le logo "Gunnebo – For a safer World" est une marque déposée de Gunnebo AB. GUFRA-PQM58A

IR DWDR Bullet Network Camera
Full HD
G363-4302
Ref Gunnebo APQM58A

