

EntraSec & EntraLight

Sturdy and smooth running
aluminium sliding gates



Werra dedicates all of its expertise to development, production and service. All its products are therefore state of art and are tailored precisely to customers' needs. Detailed research into the market guides us towards innovations. It goes without saying that the gates' security standard matches that of all our

products. Fitting is very simple, as you would expect from Werra. Construction analyses based on advanced computer simulations of realistic extreme loads to optimise manufacturing tolerances, cost and reliability of all components. All gates are prefabricated in our factory and are then subjected to functionality tests. Such

a simplified procedure brings other benefits too. A very good price/performance ratio is just as convincing as the innovative technology and attractive design. Werra offers TÜV type tests according to DIN EN 13241-1 or all electrically operated gates.

Aluminium gates EntraSec & EntraLight

Werra aluminium gates at a glance

- Very smooth running
- Individual versions with an attractive design
- Hand or power operated versions
- High stability - even with large opening widths
- Time-saving installation due to high prefabrication
- Long-time function reliability and low maintenance
- TÜV type tests according to DIN EN 13241-1
- High security standards in accordance with DIN EN 12453


EntraSec

EntraSec's™ profiled contours allows it to blend harmoniously into modern environments with powerful architectures. Attractive stainless steel look, silver-coloured eloxal coating and various RAL-based powder coatings extend the design possibilities available. You will be impressed by the gate's smooth running as well as by its attractive design. The weight-saving design doesn't just boast unequalled stability – the gates can be easily opened to 10m – the gates are opened and closed in a gentler and more even manner than that achieved by the design used to date.



Features

- Clear opening width: 2000 – 10000 mm
- Height (including 100 mm ground clearance): 1050-2450 mm
- Bar infill of stable round tube
- Power operated version: Electric drive with covered, profile integrated, spring-loaded toothed rack
- Control options include the universal control WE-Tronic II, table buttons, code card reader, climb-over or punch-through protection, floor plates, traffic lights etc.

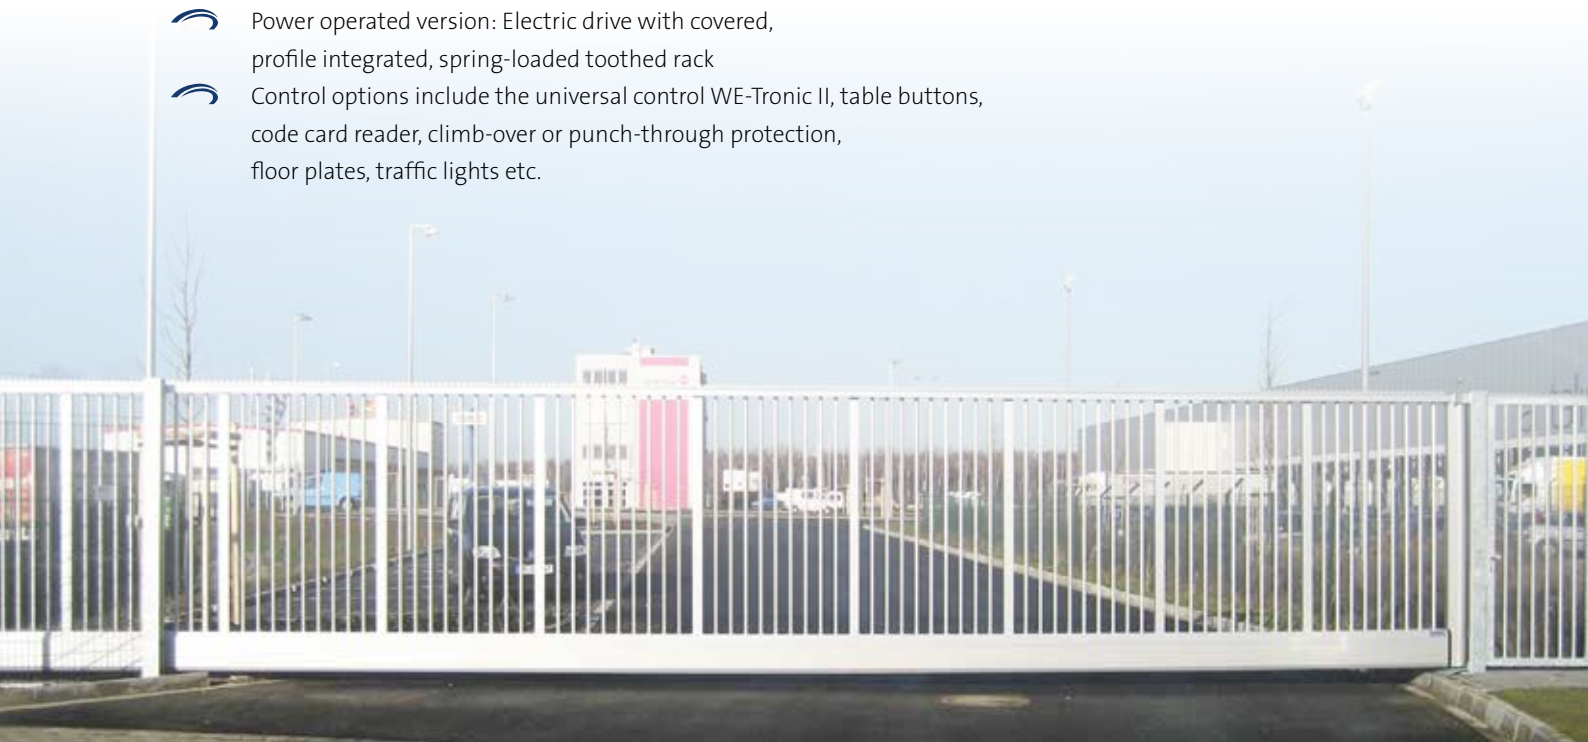

Aluminium gates EntraSec & EntraLight

EntraLight

EntraLight gates combine functionality and high efficiency. The essential features are standardised measurements and the gate infill. Silver colored anodised aluminum and different sliding gates offer excellent price/performance ratio, without compromising in terms of safety. Of course, EntraLight gates fulfill all requirements and standards for power operated gates.



Features

- Clear opening width: 2000 – 10000 mm
- Height (including 100 mm ground clearance): 1050 – 2050 mm
- Bar infill made of sturdy square tube
- Power operated version: Electric drive with covered, profile integrated, spring-loaded toothed rack
- Optional climb-over protection, floor plates, key safe, locking device etc.





Smart Intrusion Solutions

www.smartintrusions.com

Versions contain optional equipment. Technical modifications reserved.

GUNNEBO®
For a safer world

ID:5512.19001